


TRANSPORT CONTAINER F-35

The F-35 transport container is a robust and standardized solution designed for demanding civil and military operations. Certified as a CSC-compliant 1C unit in accordance with ISO 668 and ISO 1496-1, it delivers strength, flexibility, and reliable performance for the safe transportation and storage of mission-critical equipment, including forklift trucks, in all environments. With its reinforced steel structure, optimized interior, and compliance with international standards, the F-35 ensures outstanding protection, smooth handling, and compatibility with global transport systems.

SPECIFICATIONS

The F-35 transport container is constructed in accordance with CSC and ISO standards, ensuring a strong and durable steel frame built for heavy-duty use. With external dimensions of 6058 x 2438 x 2438 mm and an internal capacity of 5871 x 2236 x 2591 mm, it offers optimized space for secure transport of vehicles, equipment, and mission systems. The tare weight of approximately 2570 kg combined with a maximum gross weight of 24,000 kg provides reliable capacity for demanding operations. Multiple anchor points rated LC 3000–8000 daN enable safe fastening of cargo, while forklift compatibility and reinforced handling points support efficient loading and unloading.

	STANDARD DIMENSIONS: 6058 X 2438 X 2438 MM		INNER DIMENSIONS: 5871 X 2236 X 2236 MM
	ANCHOR POINTS: LC 3000 - 8000 DAN		EXT. COLOR - RAL1039 INT. COLOR - RAL1013
	STORAGE FOR LASHING EQUIPMENT		FORKLIFT COMPATIBLE
	NET TARE WEIGHT: 2570 KG		MAX GROSS WEIGHT: 24000 KG
	ISO STANDARDS COMPLIANCE		CSC CERTIFICATION

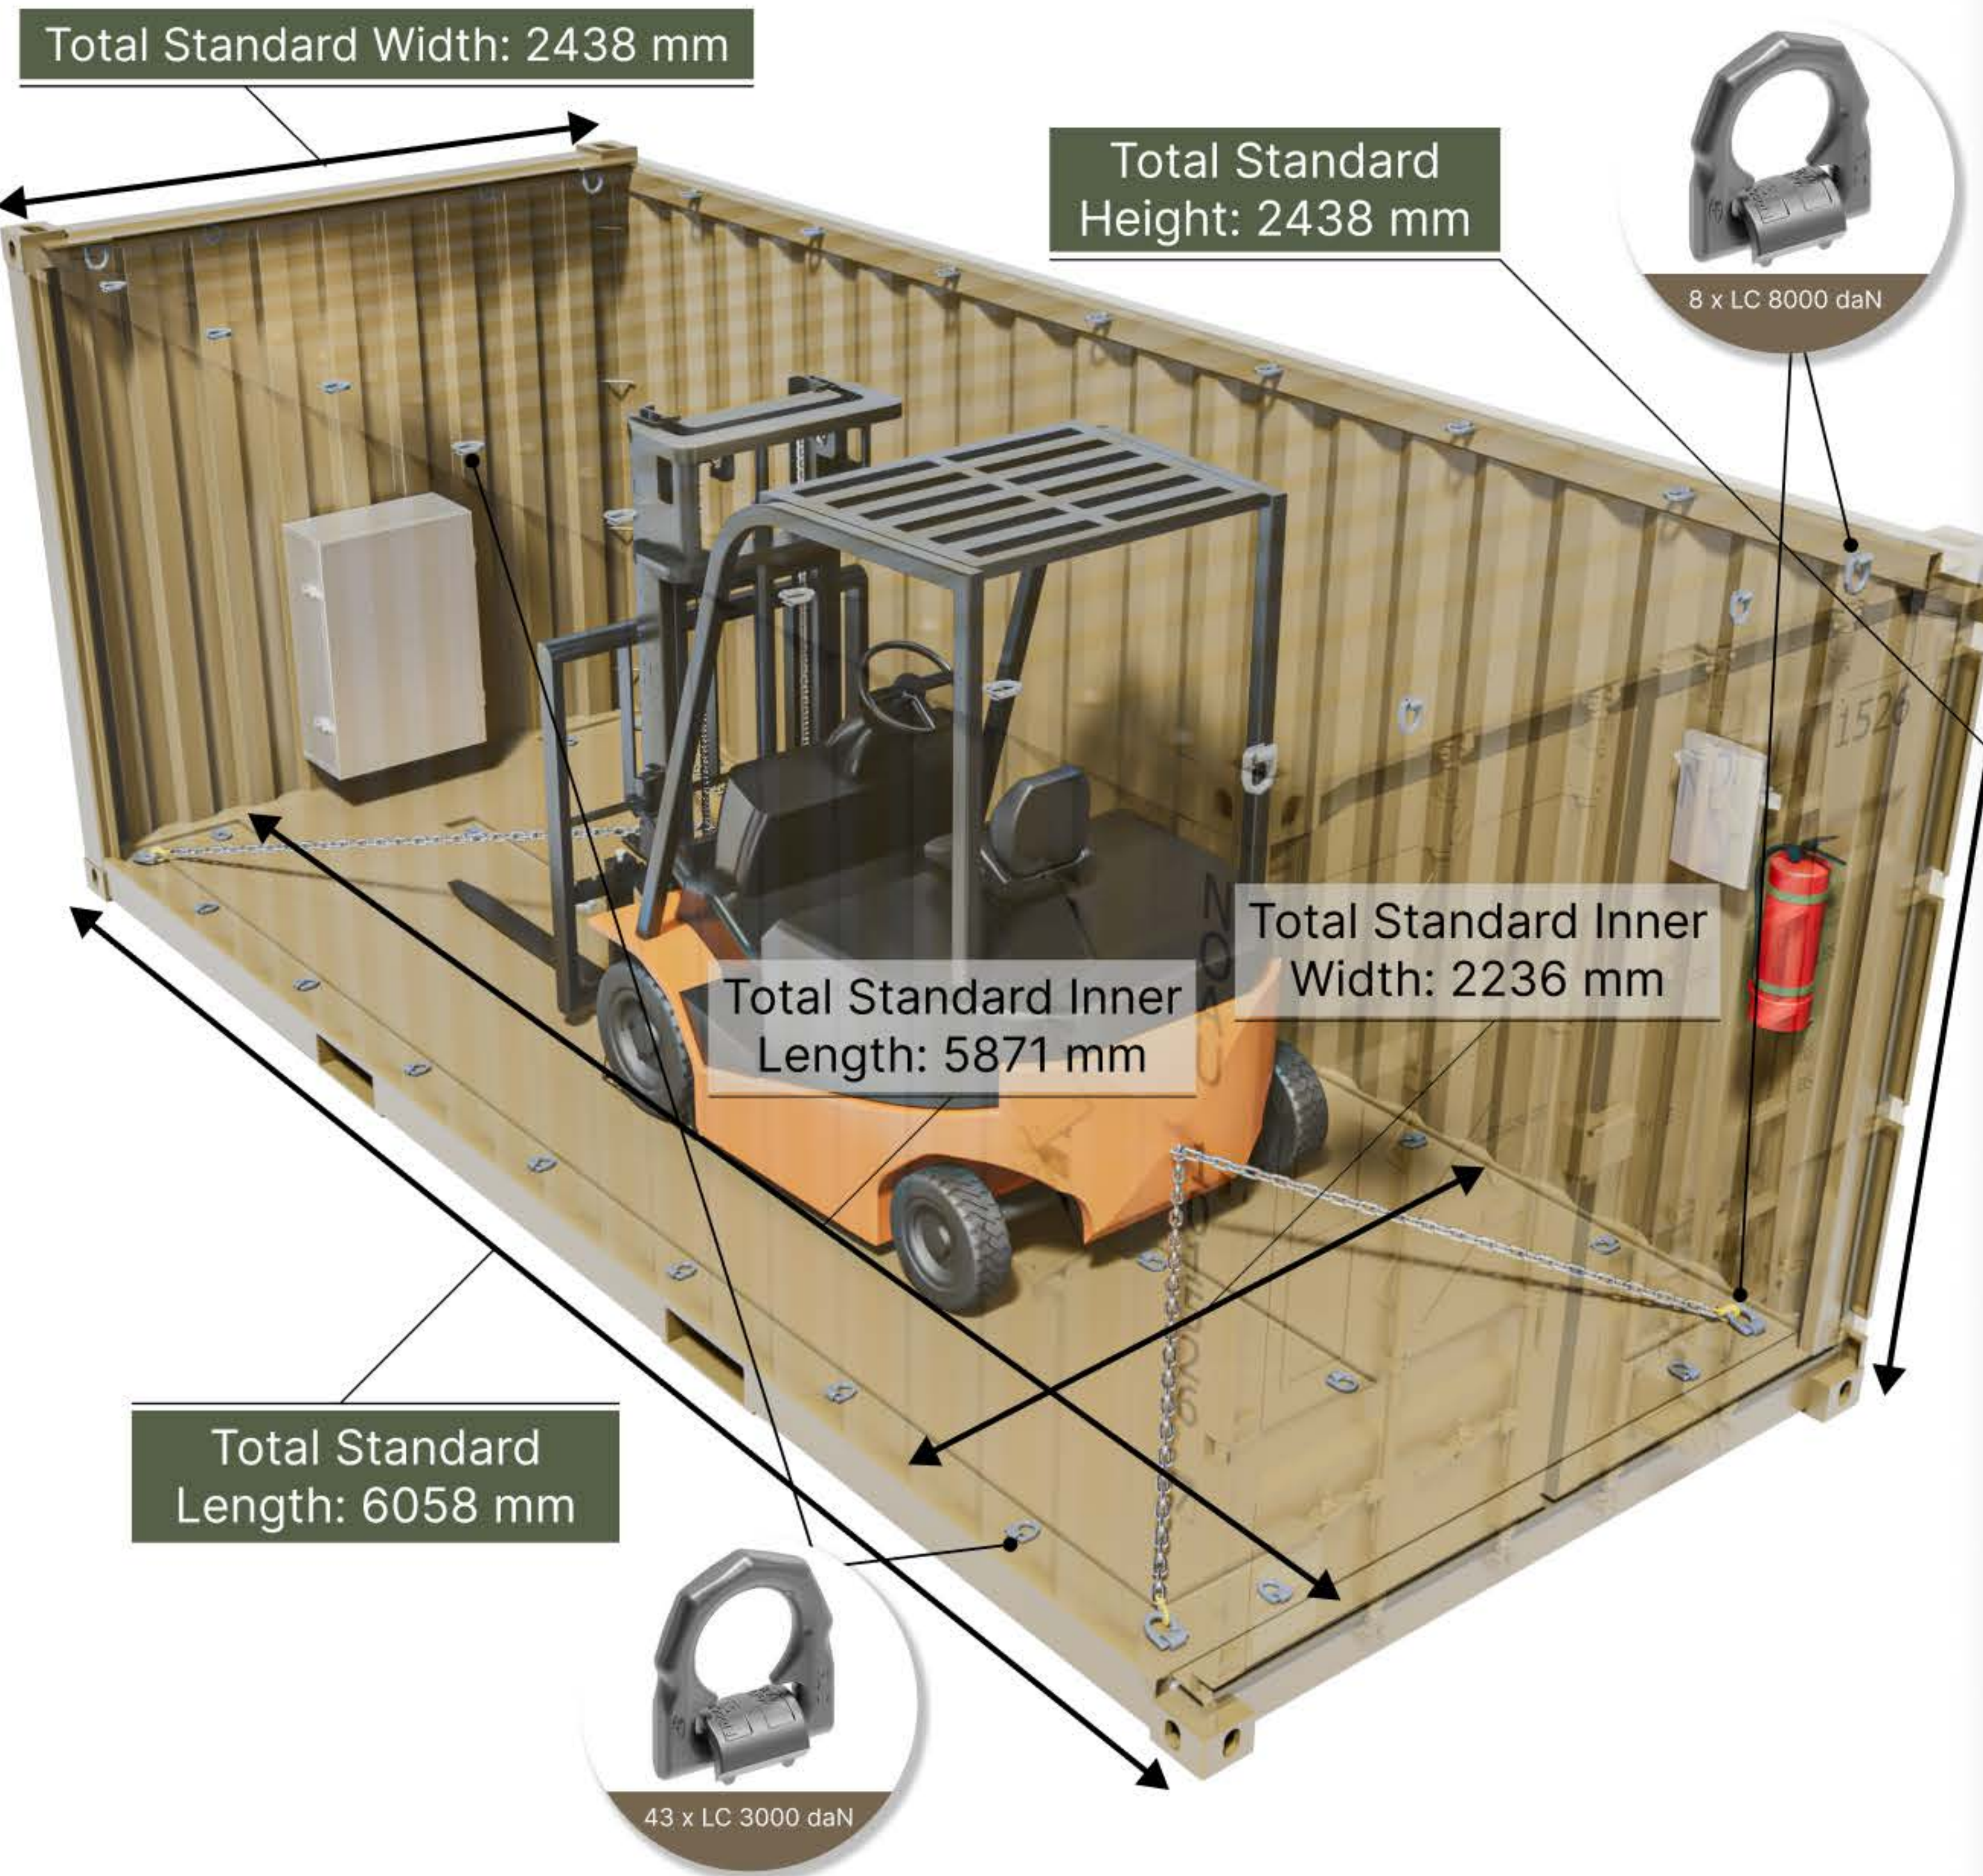

Heavy Duty Vehicle
Wheel Chock



Roof Anti-Slip
Coating



Plywood Floor
Cover 28mm

OPTIONS

The F-35 transport container can be delivered with a range of optional features designed to enhance safety, functionality, and handling. These include additional lashing points up to 8000 daN, heavy-duty wheel chocks, self-locking hooks, reinforced plywood floor cover (28 mm), roof anti-slip coating, dry air coupling, and dedicated storage for lashing equipment.




Dry Air
Coupling



Anchor Points
3000 & 8000 daN



Self-Locking
Hook

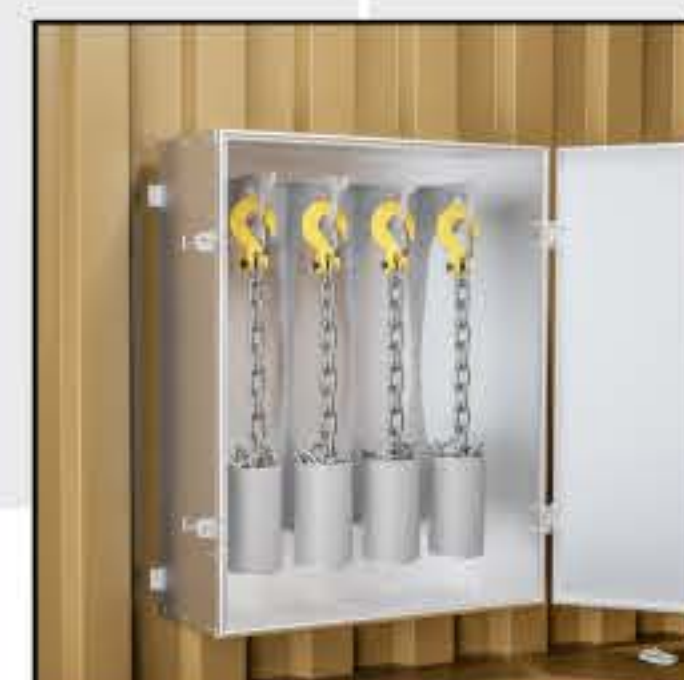


Storage for
Lashing Equipment

ANCHOR POINTS VIEW

FLOOR VIEW ANCHOR POINTS

Symbol	LC daN	MBL	KG	Amount
①	8000 daN	TBD	8000	4
②	3000 daN	TBD	3000	25

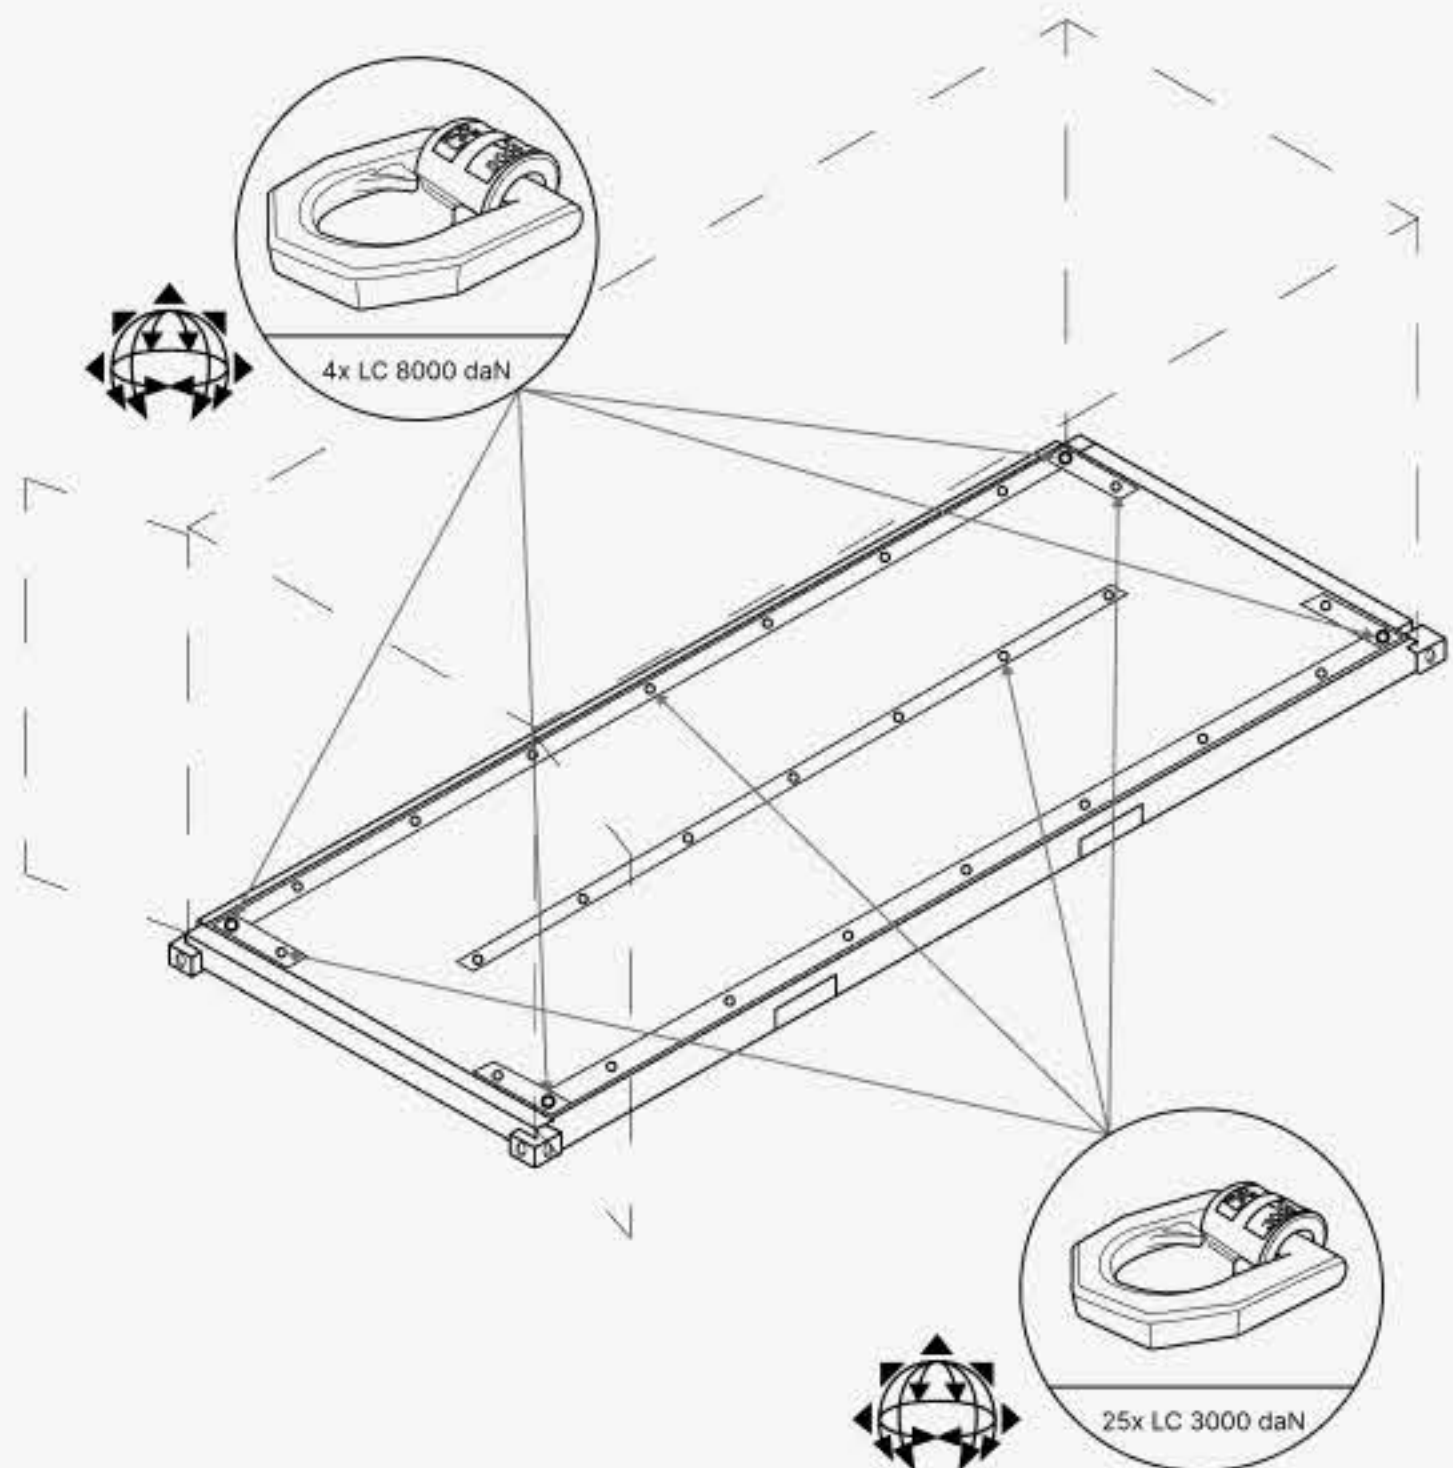

CEILING VIEW ANCHOR POINTS

Symbol	LC daN	MBL	KG	Amount
①	8000 daN	TBD	8000	4
②	3000 daN	TBD	3000	18

